



**RED ARROW**  
ELECTRICAL DISTRIBUTION




Our LED emergency downlights are discrete, easy to install and offer an effective low energy alternative to fluorescent emergency lighting.

<b>Model:</b>	LFLED3W (MAINTAINED)
<b>Voltage:</b>	220V - 240V, 50/60Hz
<b>Wattage:</b>	3W
<b>IP Rating:</b>	IP20
<b>Lumen Output:</b>	173lm
<b>Emergency Duration:</b>	3 hours
<b>Charge Time:</b>	24 hours
<b>Battery:</b>	3.6V, 3Ah
<b>Dimensions:</b>	Cut out: $\phi$ - 62; Light head: $\phi$ - 71 x h - 31mm Battery: $\phi$ - 41 x 188; Module: $\phi$ - 41 x 216mm



<b>Model:</b>	LFLED1W (NON-MAINTAINED)
<b>Voltage:</b>	220V - 240V, 50/60Hz
<b>Wattage:</b>	1W
<b>IP Rating:</b>	IP20
<b>Lumen Output:</b>	75lm
<b>Emergency Duration:</b>	3 hours
<b>Charge Time:</b>	24 hours
<b>Battery:</b>	3.6V, 3Ah
<b>Dimensions:</b>	Cut out: $\phi$ : 17; Light head: $\phi$ : 20 x h: 22mm Battery: $\phi$ : 23; Module: $\phi$ : 28 x l: 148mm

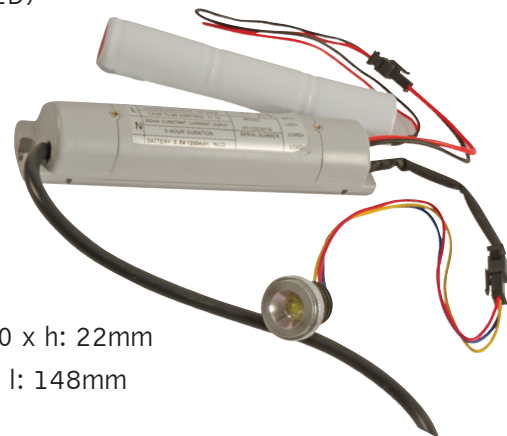

**LED Recessed Emergency Downlights**