



GUARD BOLLARD

ARCHITECTURAL BOLLARDS

Guard Architectural Bollards are stylish and robust. Available in 4 interchangeable heads. Ideal for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable.



Features

- Attractive architectural Design
- Integrated 3 Hour Emergency
- CCT Selectable
- 5 Year Warranty
- Durable powder coat finish

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
GRD24A-DC-EM-CCT	Guard Bollard Dome Head Cone Anthracite 24W 2CCT 3Hr EM	2100lm 2850lm 3600lm		14W 19W 24W	150 lm/w

Product Information

Warranty	5 Years
Emergency Battery Warranty	5 Years
On-Site Warranty	2 Years
Colour Appearance (CCT)	3000K 4000K
IP Rating	IP65
IK Rating	IK08
Emergency Battery Type	LiFePO4
Voltage	120-277V
Material (Body/Housing)	Aluminium
Material (Diffuser/Cover)	Polycarbonate

Colour Rendition (CRI)	Ra >70
Colour Finish	Anthracite RAL7016
LED Life Expectancy	L70B50 54,000 Hours
Power Factor	0.9
Frequency	50/60Hz
Driver Type	Fixed
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-0°C to 40°C
EM Working Temperature	0°C to 40°C




GUARD BOLLARD

ARCHITECTURAL BOLLARDS

Packaging Information

Dimensions (mm)	L: 210 X W: 160 Ø
Product Net Weight (kg)	2.3 kg
Barcode	5055807629379
Box Dimensions (mm)	L: 205 x W:205 x D: 345 mm

Box Gross Weight (kg)	2.61 kg
Units/Outer Carton	1
Outer Carton Dimensions (mm)	L: 430 x W: 430 x D: 365 mm

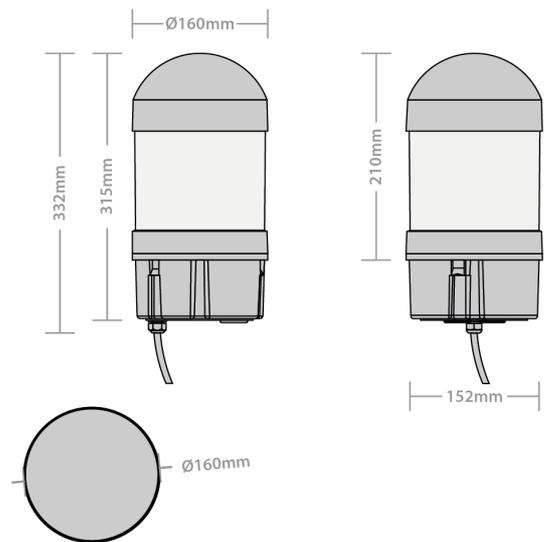

ENERGY

Red Arrow
Cone Head

A
B
C
D
E
F
G

D

24
kWh/1000h

2021 No. 1095